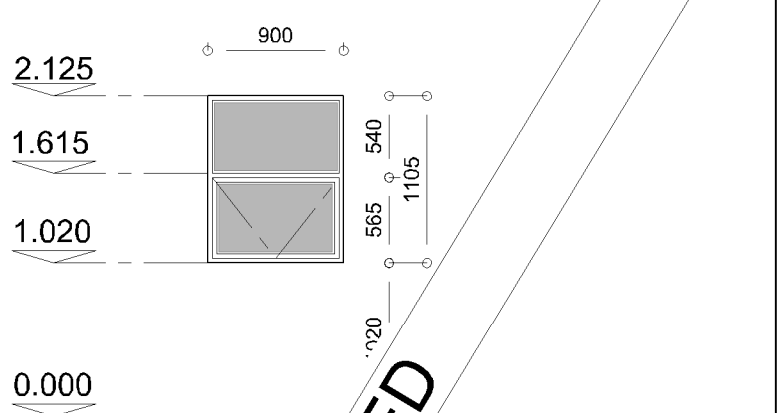
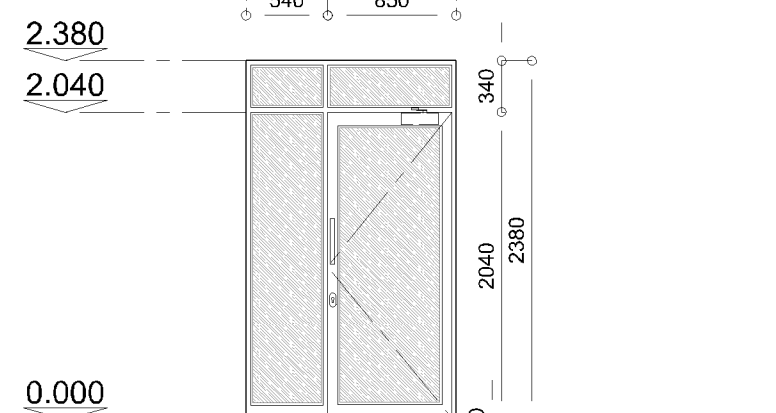
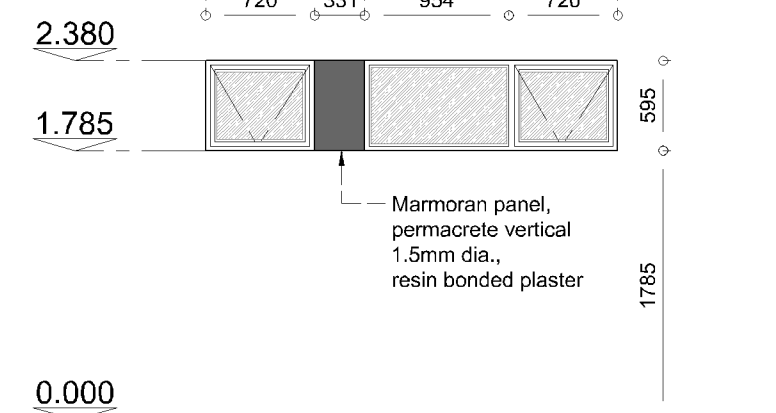
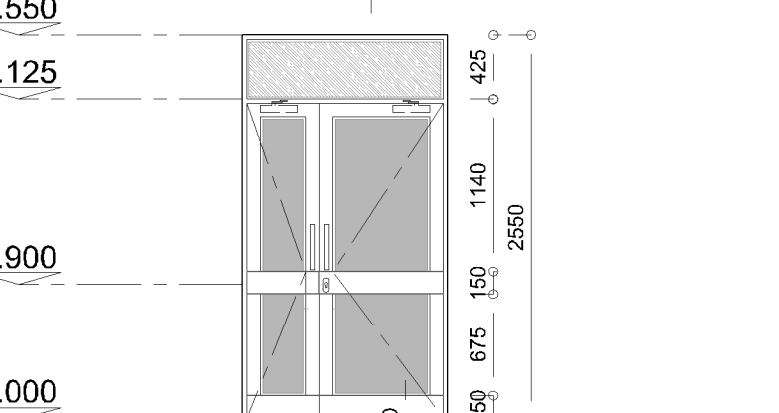
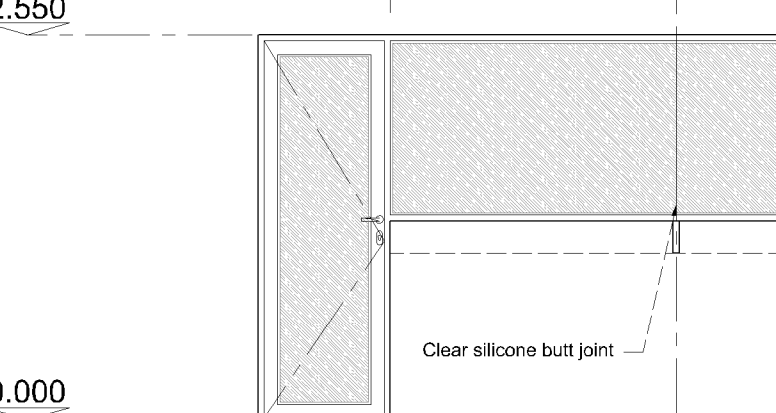


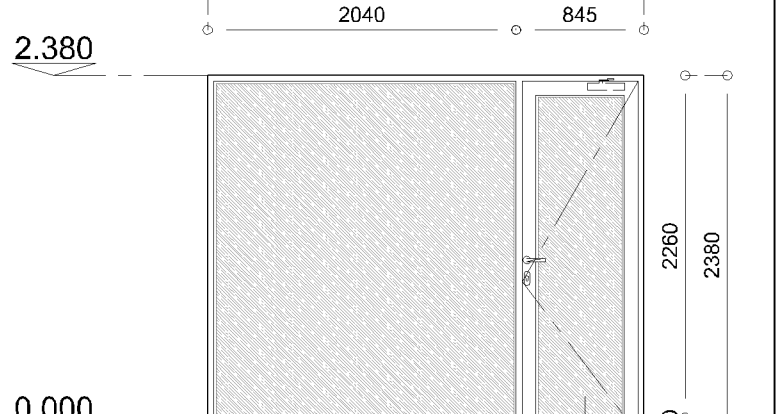
	
NUMBER AND QUANTITY	W-26 ONE)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium windowframe powdercoated with INTERPON finish according to specialist subcontractor specification as well as architects approval with a continuous clear silicone seal around all construction openings.(Colour according to the architect).
IRONMONGERY	As supplied by specialist
SECURITY	
GLASS AND GLAZING	6.38mm white translucent safety glass to comply with AAAMSA & SANS 10400.

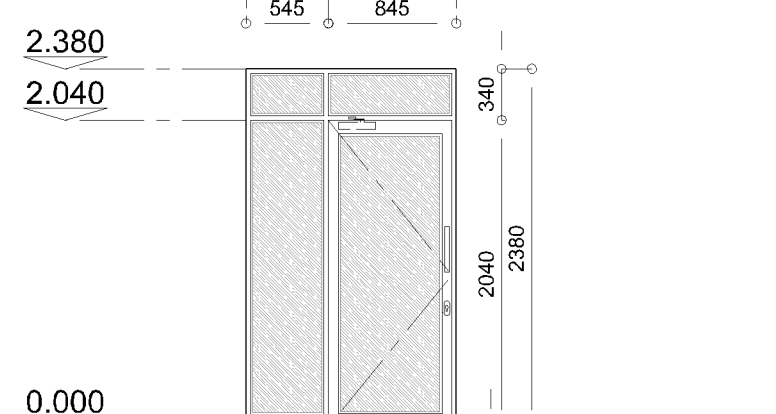
	
NUMBER AND QUANTITY	W-27 1 (ONE)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium door- & (x1) sidelight & (x2) toplight; all powdercoated with INTERPON finish according to specialist subcontractor specifications as well as architects approval with a continuous clear silicone seal around all construction openings.(Colour according to the architect).
IRONMONGERY	QS HARDWARE: (x1) pair - stainless steel round section T handle, size 30x200x300mm (Code: QS508BTB), back to back pull handle (x1) each - appropriate double cylinder lock to fit with stainless steel narrowstile deadbolt lock on 35mm backset (Code: QS 8535/4)(master keyed) (x1) pair - stainless steel narrow stile escutcheons (Code: QS4405) (x1) each QS700 door closer fitted pull side on door leaf (x1) each - door stop (Code: QS4421) (x1) each - brush seal on bottom of each door panel (x1) each - lock box with breakable glass All items to be confirmed according to recommendations and specifications of the specialist.
SECURITY	Matching laminated safety glass as supplied by the manufacturer to comply with AAAMSA & SANS 10400.
GLASS AND GLAZING	Silver/matt frosted polyester film. Solyx or similar approved with signage cutout detail elsewhere. From 0.000 to 2.380 for width of shopfront

	
NUMBER AND QUANTITY	W-28 1 (ONE)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium windowframe powdercoated with INTERPON finish according to specialist subcontractor specification as well as architects approval with a continuous clear silicone seal around all construction openings.(Colour according to the architect).
IRONMONGERY	As supplied by specialist
SECURITY	Custom fitted TRELLIDOR CLEARGUARD SECURITY SCREENS - custom sized stainless steel see-through wire mesh in a full architectural grade aluminium frame (standard profile - 45mm) with customised stainless steel hinges for added protection to match window frame (colour: acc. to architect) with fixed frame fitted to the window reveal with a powder coat finish or similar approved security products.
GLASS AND GLAZING	Safety glass as supplied by the manufacturer to comply with AAAMSA and SANS 10400.

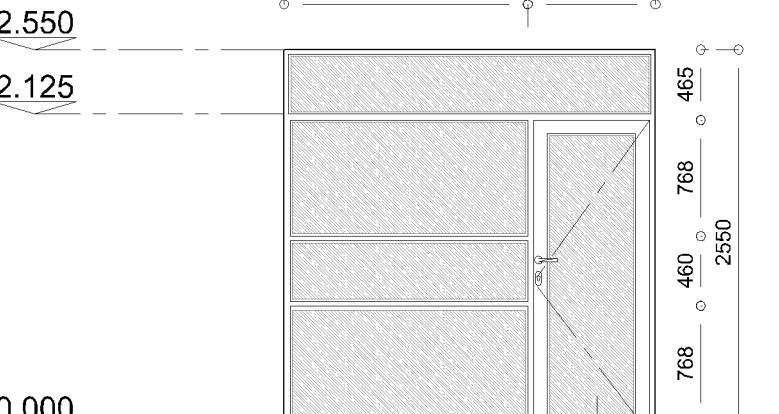
	
NUMBER AND QUANTITY	W-29 1 (ONE)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium double door- & (x1) toplight, with INTERPON powdercoated finish by specialist subcontractor to architects approval with a continuous matching silicone seal around all construction openings.(Colour according to the architect).
IRONMONGERY	QS HARDWARE: (x2) pair - stainless steel round section bolt through T handle, size 30x400x500mm (Code: QS2501BTB), back to back pullhandles on each door leaf (x2) each - appropriate double cylinder lock to fit with stainless steel narrowstile deadbolt lock on 35mm backset (Code: QS 8535/4)(master keyed) (x1) each - door stop (Code: QS4421) (x2) each QS800 transom concealed door closer with bottom pivot and hold open function (x2) pair 1.5mm, 150mm high stainless steel back to back kick plate with hairline finish (width according to doorpanel width). (x2) pair 1.5mm, 150mm high stainless steel back to back Hulseband composite push plates with hairline finish to match frame (width according to doorpanel width). All items to be confirmed according to recommendations and specifications of the specialist.
SECURITY	Matching laminated safety glass as supplied by the manufacturer to comply with AAAMSA & SANS 10400.
GLASS AND GLAZING	6.38mm white translucent safety glass to comply with AAAMSA & SANS 10400.

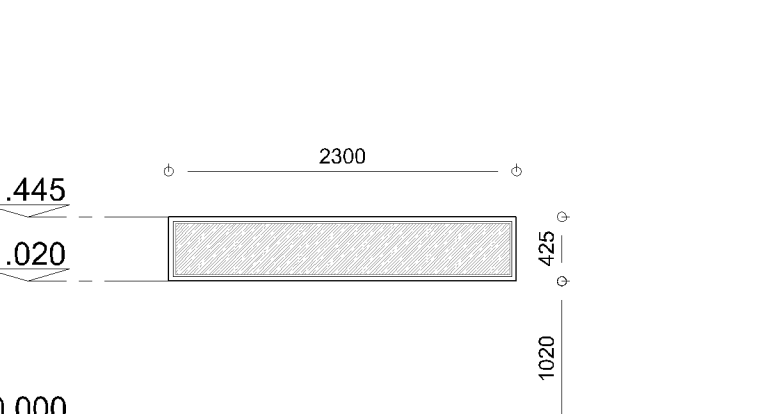
	
NUMBER AND QUANTITY	W-30 1 (ONE)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium door- & (x2) sidelight panels, with INTERPON powdercoated finish by specialist subcontractor to architects approval with a continuous matching silicone seal around all construction openings.(Colour according to the architect).
IRONMONGERY	QS HARDWARE: (x1) set solid stainless steel lever handle on rose with escutcheons (Code: Molo) (x1) each - appropriate double cylinder lock to fit with stainless steel narrowstile deadbolt lock on 35mm backset (Code: QS 8535/4)(master keyed) (x1) each - door stop (Code: QS4421) All items to be confirmed according to recommendations and specifications of the specialist.
SECURITY	Matching laminated safety glass as supplied by the manufacturer to comply with AAAMSA & SANS 10400.
GLASS AND GLAZING	Silver/matt frosted polyester film. Solyx or similar approved with signage cutout detail elsewhere. From 0.000 to 2.550 for width of shopfront

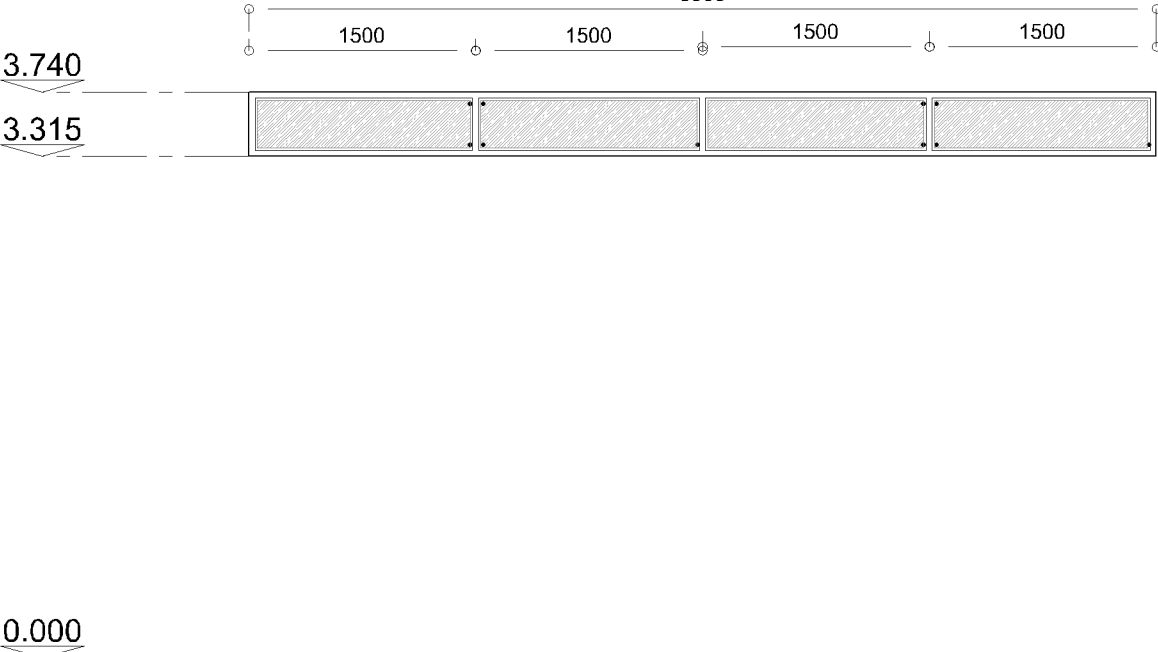
	
NUMBER AND QUANTITY	W-31 1 (ONE)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium door- & (x1) sidelight, with INTERPON powdercoated finish by specialist subcontractor to architects approval with a continuous matching silicone seal around all construction openings.(Colour according to the architect).
IRONMONGERY	QS HARDWARE: (x1) set solid stainless steel lever handle on rose with escutcheons (Code: Molo) (x1) each - appropriate double cylinder lock to fit with stainless steel narrowstile deadbolt lock on 35mm backset (Code: QS 8535/4)(master keyed) (x1) each - door stop (Code: QS4421) All items to be confirmed according to recommendations and specifications of the specialist.
SECURITY	Matching laminated safety glass as supplied by the manufacturer to comply with AAAMSA & SANS 10400.
GLASS AND GLAZING	Silver/matt frosted polyester film. Solyx or similar approved with signage cutout detail elsewhere. From 0.000 to 2.380 for width of shopfront

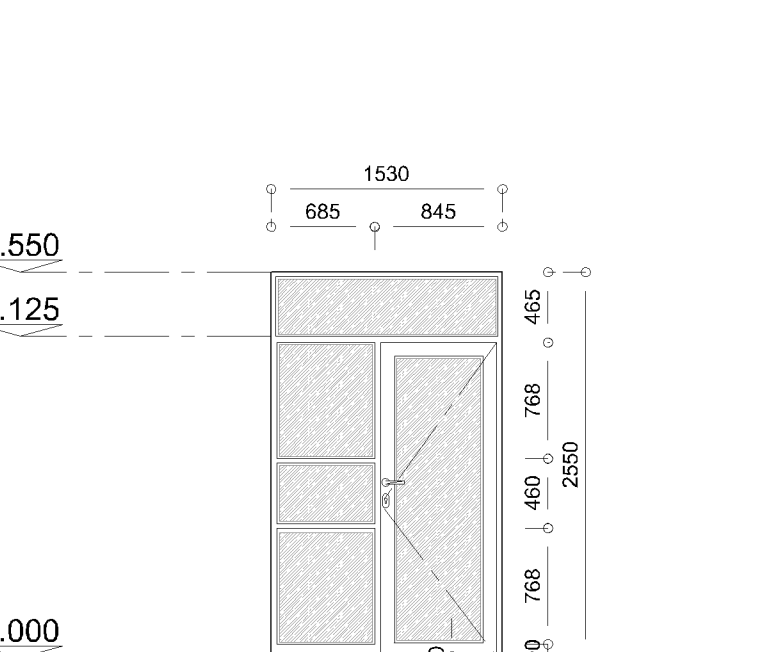
	
NUMBER AND QUANTITY	W-32 1 (ONE)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium door- & (x1) sidelight & (x2) toplight; all powdercoated with INTERPON finish according to specialist subcontractor specifications as well as architects approval with a continuous clear silicone seal around all construction openings.(Colour according to the architect).
IRONMONGERY	QS HARDWARE: (x1) pair - stainless steel round section T handle, size 30x200x300mm (Code: QS508BTB), back to back pull handle (x1) each - appropriate double cylinder lock to fit with stainless steel narrowstile deadbolt lock on 35mm backset (Code: QS 8535/4)(master keyed) (x1) pair - stainless steel narrow stile escutcheons (Code: QS4405) (x1) each QS700 door closer fitted pull side on door leaf (x1) each - door stop (Code: QS4421) (x1) each - brush seal on bottom of each door panel (x1) each - lock box with breakable glass All items to be confirmed according to recommendations and specifications of the specialist.
SECURITY	Matching laminated safety glass as supplied by the manufacturer to comply with AAAMSA & SANS 10400.
GLASS AND GLAZING	Silver/matt frosted polyester film. Solyx or similar approved with signage cutout detail elsewhere. From 0.000 to 2.380 for width of shopfront

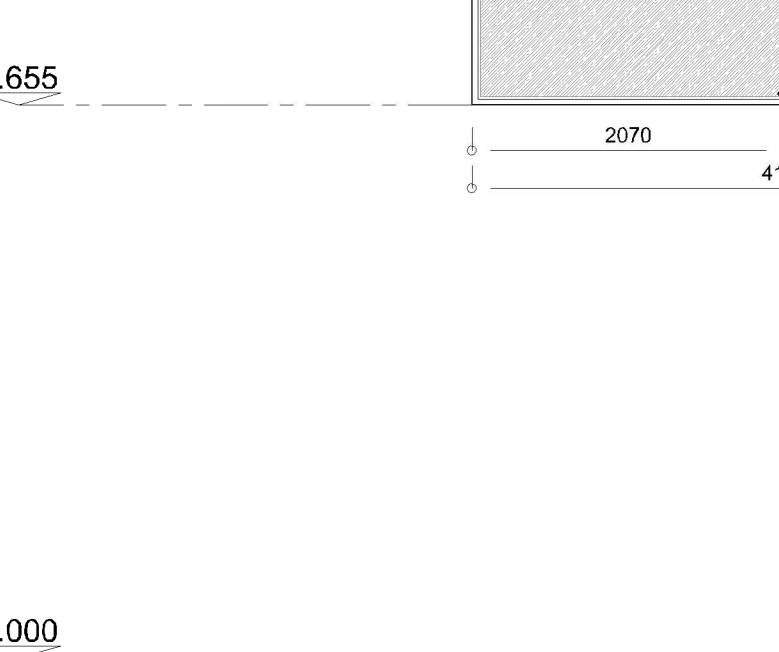
	
NUMBER AND QUANTITY	W-33 1 (ONE)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium windowframe powdercoated with INTERPON finish according to specialist subcontractor specification as well as architects approval with a continuous clear silicone seal around all construction openings.(Colour according to the architect).
IRONMONGERY	As supplied by specialist
SECURITY	
GLASS AND GLAZING	Safety glass as supplied by the manufacturer to comply with AAAMSA and SANS 10400.

	
NUMBER AND QUANTITY	W-34 1 (ONE)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium door- & (x3) sidelight and (x1) toplight, with INTERPON powdercoated finish by specialist subcontractor to architects approval with a continuous matching silicone seal around all construction openings.(Colour according to the architect).
IRONMONGERY	QS HARDWARE: (x1) set solid stainless steel lever handle on rose with escutcheons (Code: Molo) (x1) each - appropriate double cylinder lock to fit with stainless steel narrowstile deadbolt lock on 35mm backset (Code: QS 8535/4)(master keyed) (x1) each - door stop (Code: QS4421) All items to be confirmed according to recommendations and specifications of the specialist.
SECURITY	Matching laminated safety glass as supplied by the manufacturer to comply with AAAMSA & SANS 10400.
GLASS AND GLAZING	Silver/matt frosted polyester film. Solyx or similar approved with signage cutout detail elsewhere. From 0.000 to 2.550 for width of shopfront

	
NUMBER AND QUANTITY	W-35 2 (TWO)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium windowframe powdercoated with INTERPON finish according to specialist subcontractor specification as well as architects approval with a continuous clear silicone seal around all construction openings.(Colour according to the architect).
IRONMONGERY	As supplied by specialist
SECURITY	
GLASS AND GLAZING	One directional safety glass to architects approval such as solarshield S10 silver as supplied by the manufacturer to comply with AAAMSA and SANS 10400.

	
NUMBER AND QUANTITY	W-36 1 (ONE)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium windowframe powdercoated with INTERPON finish according to specialist subcontractor specification as well as architects approval with a continuous clear silicone seal around all construction openings (Colour according to the architect).
IRONMONGERY	As supplied by specialist
SECURITY	
GLASS AND GLAZING	Safety glass as supplied by the manufacturer to comply with AAAMSA and SANS 10400.

	
NUMBER AND QUANTITY	W-37 1 (ONE)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium door- & (x3) sidelight and (x1) toplight, with INTERPON powdercoated finish by specialist subcontractor to architects approval with a continuous matching silicone seal around all construction openings.(Colour according to the architect).
IRONMONGERY	QS HARDWARE: (x1) set solid stainless steel lever handle on rose with escutcheons (Code: Molo) (x1) each - appropriate double cylinder lock to fit with stainless steel narrowstile deadbolt lock on 35mm backset (Code: QS 8535/4)(master keyed) (x1) each - door stop (Code: QS4421) All items to be confirmed according to recommendations and specifications of the specialist.
SECURITY	Matching laminated safety glass as supplied by the manufacturer to comply with AAAMSA & SANS 10400.
GLASS AND GLAZING	Silver/matt frosted polyester film. Solyx or similar approved with signage cutout detail elsewhere. From 0.000 to 2.550 for width of shopfront

	
NUMBER AND QUANTITY	W-38 1 (ONE)
DESCRIPTION OF DOOR PANEL, FRAME AND FINISH	Custom aluminium windowframe powdercoated with INTERPON finish according to specialist subcontractor specification as well as architects approval with a continuous clear silicone seal around all construction openings.(Colour according to the architect).
IRONMONGERY	As supplied by specialist
SECURITY	
GLASS AND GLAZING	Safety glass as supplied by the manufacturer to comply with AAAMSA and SANS 10400.

NOTES

UNDER NO CIRCUMSTANCES MAY THIS DOCUMENT BE REPRODUCED WITHOUT THE CONSENT OF DE JONGS DESIGN STUDIO CC.

DRAWINGS MAY NOT BE SCALED.

ALL DIMENSIONS AND HEIGHTS MUST BE CORRELATED BEFORE ANY WORK COMMENCES OR BEFORE MATERIALS ARE ORDERED.

IT IS THE CONTRACTOR'S RESPONSIBILITY TO SET-OUT CONSTRUCTION WORK ACCURATELY ON SITE WITH REFERENCE TO SITE BOUNDARIES, BUILDING LINES SERVITUDES AND ESPECIALLY IN CIRCUMSTANCES WHERE WORK CONNECT WITH EXISTING STRUCTURES.

ALL FLOOR LEVEL HEIGHTS INDICATED ON DRAWINGS REFER TO UNFINISHED LEVELS AND ANY AMBIGUOUS OR CONTRADICTORY INFORMATION SHOULD IMMEDIATELY BE CO-ORDINATED WITH THE ARCHITECT. A FULL SET OF DRAWINGS SHOULD BE KEPT ON SITE BY THE CONTRACTOR.

ALL DIMENSIONS INDICATE ON DRAWINGS SHOULD BE SET-OUT ON A LEVEL HORIZONTAL PLANE.

THE CONTRACTOR SHOULD MAKE USE OF CORNER PROFILES MARKED ON 85MM BRICK GAUGE, UNLESS DIFFERENTLY SPECIFIED.

THE CONTRACTOR IS RESPONSIBLE TO USE APPROVED DAMP PROOF COURSE IN EXTERNAL WALLS AND DAMP PROOF MEMBRANES UNDER FLOOR SLABS.

THE QUALITY OF ALL MATERIALS AND WORKMANSHIP SHOULD COMPLY WITH THE RELEVANT S.A.B.S. SPECIFICATIONS AND STANDARDS.

ALL MINIMUM STANDARDS AS SET OUT IN THE NATIONAL BUILDING REGULATIONS AND STANDARDS ACT SANS 10400 ARE ALSO APPLICABLE IN SITUATIONS WHERE NOT SPECIFICALLY REFERRED TO.

ALL GEYSERS AND WARM WATER MUST COMPLY WITH SANS 10254. WATER RETICULATION INSTALLATION MUST COMPLY WITH SANS 10252-1. ALL UPVC PIPES MUST COMPLY WITH SANS 966. ALL COPPER PIPES MUST COMPLY WITH SANS 460. ALL HDPE PIPES MUST COMPLY WITH SANS 533. ALL TAPS AND MIXERS MUST COMPLY WITH SANS 226. SANS 1026, SANS 1808-35 EN 1808-37.

No	REVISION	DATE	APPROVED
CONSULTANT			
deStudio Architects & Urban Planners Reg no.: CK 2009/1157/123 2 Second Street, Po Box 26079, Dan Pienaar, Bloemfontein 9310 Tel: +27 (0) 51 436 0130 Fax: +27 (0) 51 436 1177 Adèle de Jong Pr. Arch 21159, Pr. Pln A/1423/2011 +27 (0) 84 400 9364 Alphonse de Jong Pr. Arch 7632 +27 (0) 82 946 0777 info@deStudio.co.za www.deStudio.co.za			
Architects & Urban Planners			

PROFESSIONAL ARCHITECT
ADELE DE JONG
12-21 PM (John de Jong) on 01 Jun 2021



PROGRAMME MANAGER



CLIENT



LOGOBATE PHC PROJECT

UPGRADE AND REFURBISHMENT TO EXISTING HEALTH FACILITY, ON PORTION 60 ON THE FARM 219 KURUMAN DISTRICT NORTHERN CAPE

DRAWING	
WINDOW SCHEDULE	
DRAWN	DATE
A.d.J/ A.C.d.J	21/9/2026
APPROVED	DATE
SCALE	ISSUED
AS INDICATED	21/9/2026
DRAWING STATUS	00 DRAWING No
TENDER DRAWINGS	14-158_P4_15